

## Vauxhall Assistance and warranties\*

Every Vivaro base vehicle comes with:

- A one-year unlimited mileage manufacturer's warranty
- Second and third year no-fee customer option warranty up to 100,000 miles from date of first registration
- Vauxhall Assistance for 12 months from date of first registration
- Six-year body panel anti-perforation warranty

\* Warranty is only available on vehicles sourced from Vauxhall Motors Ltd. Terms and conditions apply – please see your Vauxhall retailer for details

## Vauxhall recognised conversions

These conversions have been fully tested to ensure they meet the exacting technical standards required by Vauxhall Motors Limited.

## Convertor contact details

For conversion pricing, option and warranty details contact:

Cold Consortium Limited,  
Unit 8, Holme Industrial Estate,

Skiff Lane, Holme on Spalding Moor,

York YO43 4BB

Tel: 01430 861373

Fax: 01430 861209

E-mail: sales@coldconsortium.co.uk

Destination code: GB3000

## Engines Euro 4 compliant

	2.0CDTI 16v (90PS)	2.0CDTI 16v (115PS)	2.5CDTI 16v (146PS)
Fuel type	Diesel	Diesel	Diesel
Capacity	1995cc	1995cc	2464cc
Maximum power	90PS (66kW) @ 3500rpm	115PS (84kW) @ 3500rpm	146PS (107kW) @ 3500rpm
Maximum torque	240Nm (177 lb.ft.) @ 1500rpm	290Nm (214 lb.ft.) @ 1600rpm	320Nm (236 lb.ft.) @ 1500rpm
Layout	4 cylinders, 4 valves per cylinder, double overhead camshafts		
Fuel/induction system	Turbocharger and intercooler. Common rail fuel injection		
Service interval	18,000 miles or one year (whichever occurs sooner)		

## Weights\*\* kg

Model	UK plated weights and kerbweights					
	Front axle	Rear axle	GVW	Total	Kerb	Payload
<b>SWB</b>						
2900 2.0CDTI 16v (90PS/115PS)	1580	1650	2935	1880	1880	1055
2900 2.0CDTI 16v (115PS) Tecshift	1580	1650	2945	1892	1892	1053
2900 2.5CDTI 16v (146PS)	1580	1650	2985	1927	1927	1058
2900 2.5CDTI 16v (146PS) Tecshift	1580	1650	2995	1940	1940	1055
<b>LWB</b>						
2900 2.0CDTI 16v (90PS/115PS)	1580	1650	2960	1927†	1927†	1033†
2900 2.0CDTI 16v (115PS) Tecshift	1580	1650	2930	1939†	1939†	991†
2900 2.5CDTI 16v (146PS)	1620	1650	3035	1974†	1974†	1061†
2900 2.5CDTI 16v (146PS) Tecshift	1620	1650	3005	1987†	1987†	1018†

† = Estimated weights.

\*\* Please note: Typical examples shown above. **Kerbweights** include conversion body weight†, coolant, oil, 90% full fuel tank and spare wheel. They will vary according to the vehicle specification (including options and accessories) with a corresponding variation in payload. **Payload** figures do not allow for the weight of the driver, or any passengers, which should therefore be deducted from the figures shown. **Gross plated weights** (including axle weights) quoted on the vehicle plate must never be exceeded. **Towing weights** should not exceed 750kg (unbraked trailer) or 2000kg (braked trailer).

Every effort has been made to ensure that the contents of this publication were accurate and up-to-date at the time of going to press (September 2007). Vauxhall vehicles are equipped with components manufactured by various General Motors operating units and outside suppliers. The Company reserves the right to alter specifications and withdraw products from sale without notice. Any such alterations will be notified to Vauxhall retailers at the earliest opportunity, please consult your local retailer for the latest information. Please note that Vauxhall retailers are not the agents of Vauxhall Motors Limited and are not authorised to bind the Company by any specific or implied undertaking or representation. It is advisable to ensure that your motor insurance policy provides adequate cover for additional fitted options and accessories. As part of Vauxhall's policy of environmental care, this brochure is printed on paper manufactured using Elemental Chlorine Free pulps from specially farmed, sustainable timber resources. All rights reserved. No part of this publication may be reproduced in any form or by any means, without the prior written permission of Vauxhall Motors Limited.

VM0707368 Published September 2007 (BMB/Graymatter) Vauxhall Motors Limited, Luton LU1 3YT

# Vivaro

2008 Edition 1

## Temperature Controlled Vehicles



The Wheels of Business



# VIVARO CHILLER CONVERSION

Cold Consortium offers a range of Vivaro conversions featuring lightweight load area insulation with an easy-clean, bactericide impregnated finish. Unlike many temperature controlled vans, this Vivaro conversion does not require a PTO (power take-off) and the refrigeration unit is internally mounted, saving costs and improving fuel economy at the same time. Other benefits include an eye-level, in-cab digital display for monitoring load area temperature which can be specified by the operator – chiller (0°C to 8°C), low temperature (down to -18°C), deep freeze (down to -25°C) or multi-temperature.

VAUXHALL  
RECOGNISED  
CONVERSION



## Standard feature highlights

- Driver's airbag
  - Anti-lock Braking System (ABS) with Electronic Brakeforce Distribution (EBD)
  - Emergency Brake Assist (EBA)
  - Height-adjustable padded head restraints
  - Six-way adjustable driver's seat
  - Dual passengers' bench seat
  - Three inertia-reel lap and diagonal seatbelts
  - Pyrotechnic body-lock seatbelt pretensioners
  - Height-adjustable outer seatbelts
  - Electronic engine deadlock immobiliser
  - CD 30 MP3 stereo radio/CD player with MP3 format
  - Remote control central deadlocking
  - Front door side-impact protection beams
  - Six-speed manual gearbox
- Full specification, option and colour availability details of the Vivaro range appear in the Vivaro brochure available from your Vauxhall retailer or Lo-call 0845 600 1500.

## Optional feature highlights (at extra cost)

- Passengers' twin airbag
- Air conditioning
- Tecshift six-speed transmission
- Satellite navigation system
- Remote control security system

## Please note

Typical conversion examples shown. Conversions on Astravan, Combo and Movano models and other variants are available please consult the converter. Full specification, option and colour availability details of the Vivaro range appear in the Vivaro brochure available from your Vauxhall retailer or Lo-call 0845 600 1500.

## Typical conversion features


- Temperature range (0°C to 8°C)
- DIAVIA Frigo 3000 Under-bonnet refrigeration system with automatic defrost
- Fully insulated bulkhead finished with grey vinyl in cab
- CFC-free high density, lightweight foam insulation panels fully bonded into the vehicle
- Fully insulated and sliding side-access and rear doors
- Heat reflective lining to all doors
- Full-access retained for door gear and lighting clusters
- Refrigeration unit wiring loom and hose trunking incorporated within bulkhead
- Easy-clean Epoxy-resin, bactericide impregnated top coat in loadspace
- Aluminium floor thresholds with a minimum of one floor drain
- Drain trough to bulkhead for wet product transport
- Facia-operated low temperature loadspace light
- Moulded wheel arch boxes
- Eye-level in-cab digital display for monitoring load area temperature

## Conversion options (at extra cost)


- Low-temperature to -18°C. Deep-freeze to -25°C
- Multi-temperature conversions
- Alternative refrigeration systems (Carrier, Diavia, GAH and Hubbard)
- Load area temperature recorder
- Load shelving
- Load restraining systems
- Load area pallet protection
- Meat rail systems
- Thermal strip curtains
- Rear under-run protection

## Dimensions

### SWB std. roof

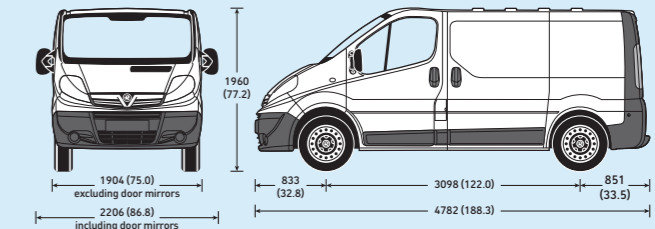

### LWB std. roof

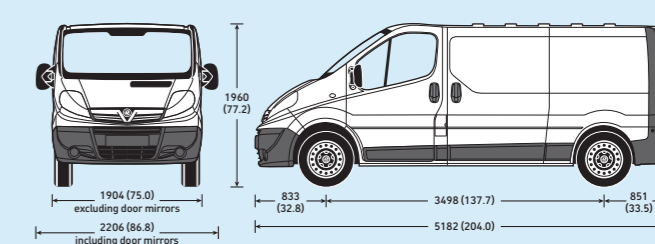

Measurements are shown in millimetres (inches). All heights are shown unladen.

## Load area dimensions mm (inches)

Loadspace	SWB std. roof	LWB std. roof
Load floor length	2095 (82.5)	2495 (98.2)
Maximum height	1255 (49.4)	1255 (49.4)
Maximum width	1590 (62.6)	1590 (62.6)
Width between wheel arches	1235 (48.6)	1235 (48.6)